

THERMOCOUPLE TOLERANCES

K (NiCr - NiAl); N (NiCrSi - NiSi); J (Fe - CuNi); T (Cu- CuNi)

A

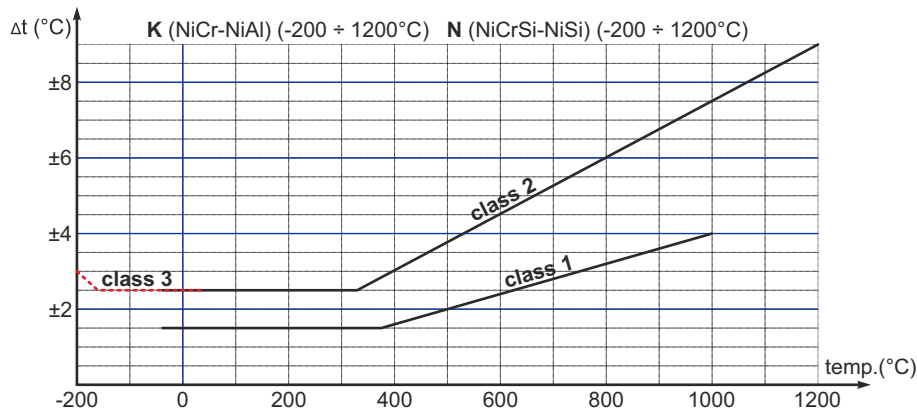


TABLE 1 as per PN-EN 60584

tolerance class	temperature range	tolerance (°C)
1	-40 ÷ 375°C	± 1,5
	375 ÷ 1000°C	± 0,004 (t)
2	-40 ÷ 333°C	± 2,5
	333 ÷ 1200°C	± 0,0075 (t)
3	-200 ÷ -167°C	± 0,015 (t)
	-167 ÷ 40°C	± 2,5

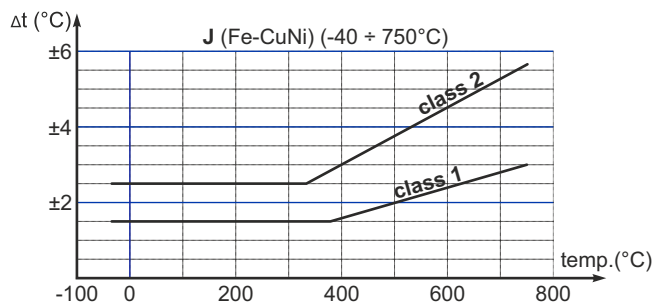


TABLE 2 as per PN-EN 60584

tolerance class	temperature range	tolerance (°C)
1	-40 ÷ 375°C	± 1,5
	375 ÷ 750°C	± 0,004 (t)
2	-40 ÷ 333°C	± 2,5
	333 ÷ 750°C	± 0,0075 (t)

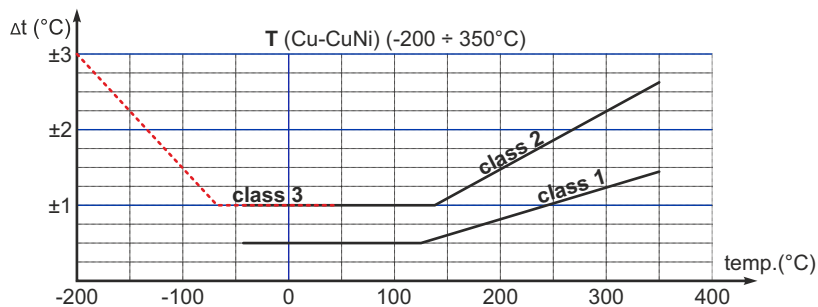


TABLE 3 as per PN-EN 60584

tolerance class	temperature range	tolerance (°C)
1	-40 ÷ 125°C	± 0,5
	125 ÷ 350°C	± 0,004 (t)
2	-40 ÷ 133°C	± 1
	133 ÷ 350°C	± 0,0075 (t)
3	-200 ÷ -67°C	± 0,015 (t)
	-67 ÷ 40°C	± 1