


CODE LIST

CONNECTORS

Z1

MINI

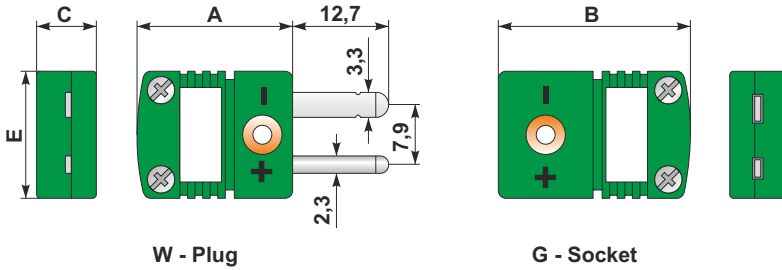

W - Plug


G - Socket

DIMENSION	POLYAMIDE	CERAMIC
A	20,6	22,4
B	25,4	26,9
C	7,9	9,7
E	16,8	19,1

temperature range: polyamide (-29 ÷ 220°C); ceramic (-29 ÷ 650°C)

Z2

STANDARD

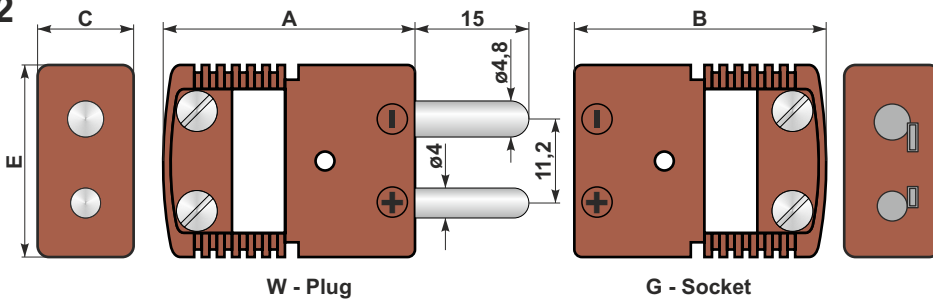

W - Plug


G - Socket

DIMENSION	POLYAMIDE	CERAMIC
A	33,3	38,1
B	33,3	38,1
C	12,7	16,0
E	25,4	25,4

temperature range: polyamide (-29 ÷ 220°C); ceramic (-29 ÷ 650°C)

Z3

MINI 3P

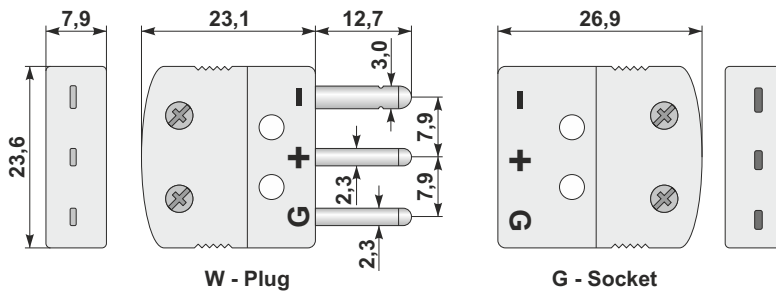


W - Plug

G - Socket

temperature range: polyamide (-29 ÷ 220°C)

GDM/GSP

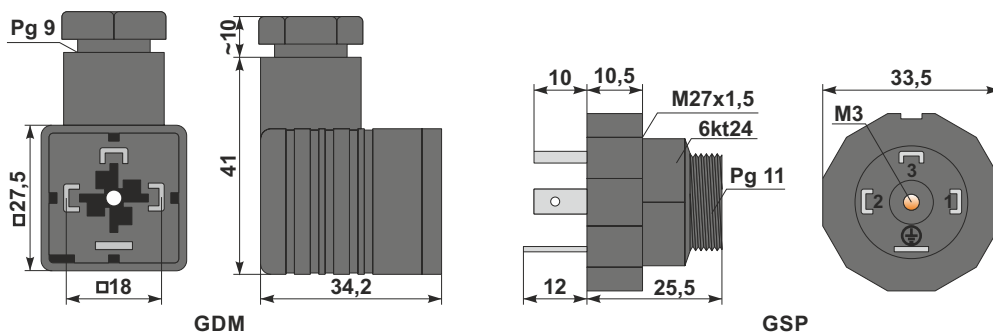

GDM

GSP

temperature range: polyamide (-29 ÷ 125°C)

EXACT DESCRIPTION IN PART »H« OF THE CATALOG